


Rubber Tracks, Rubber Pads, Over Tyre Tracks, Puncture-Proof Tyres for excavators, skidsteers & tracked vehicles.
Steel tracks and undercarriage parts for many common brand name Excavators

Measuring a grouser plate for fitting rubber pads.

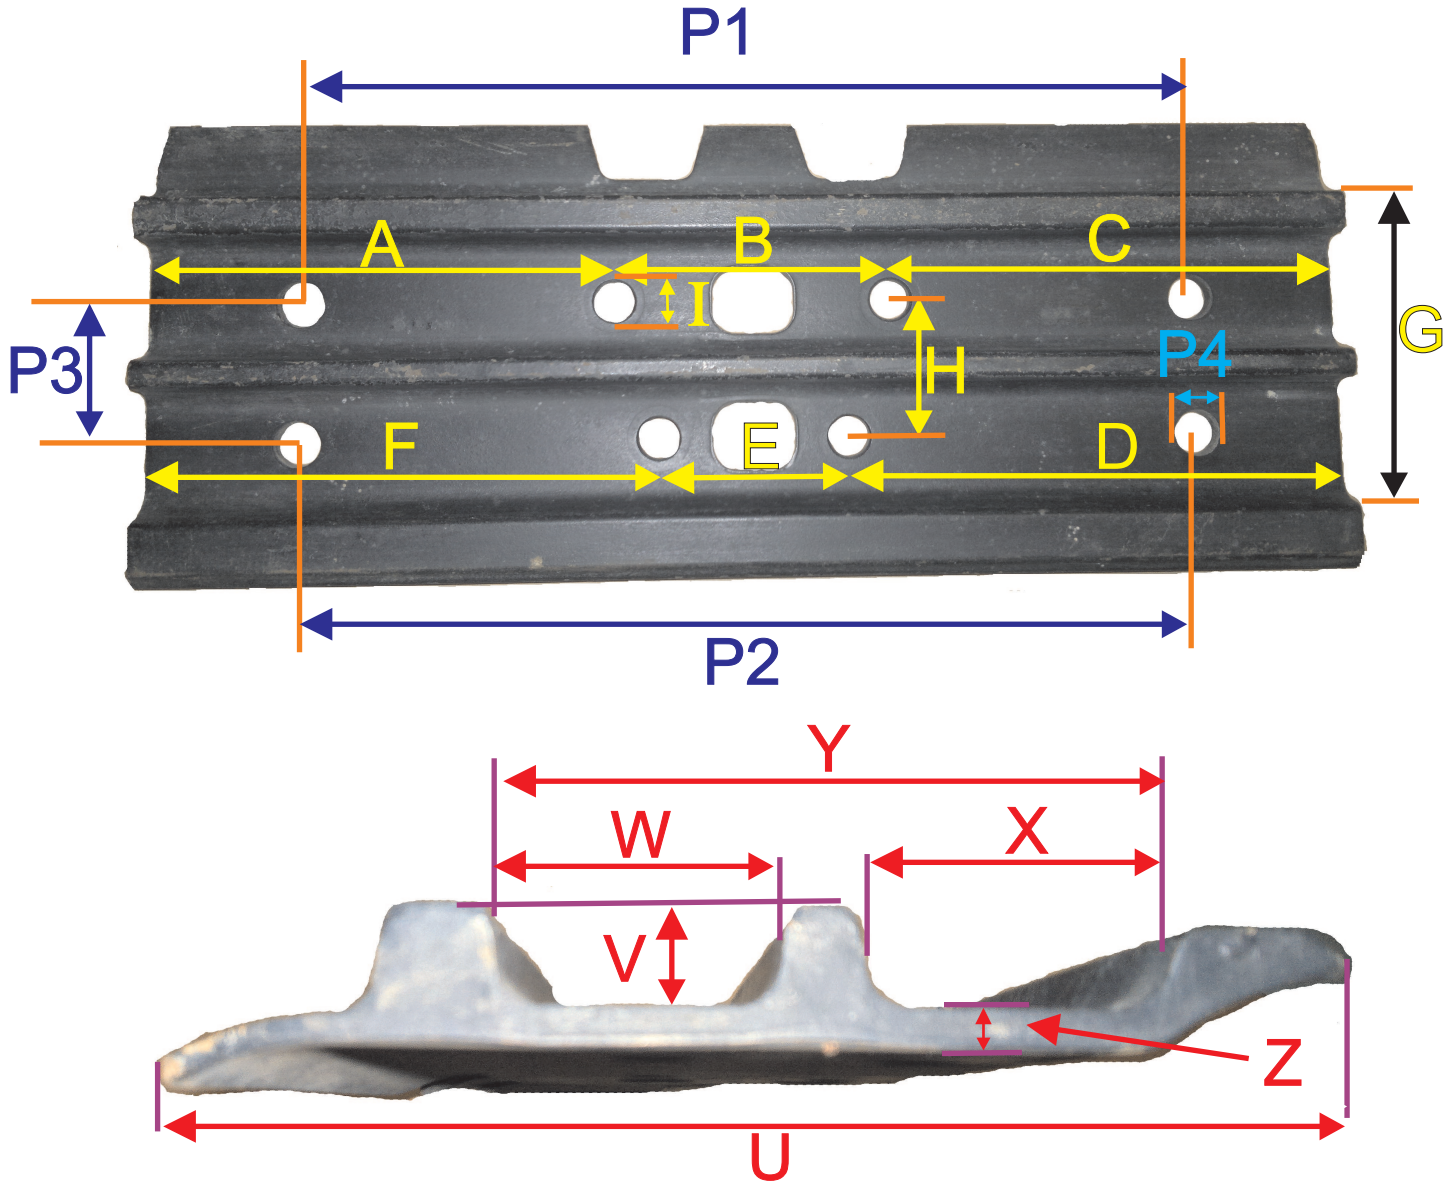

Grouser dimensions

- A = _____ mm (side to centre of Chain hole)
 B = _____ mm (centre of hole to centre of other hole)
 C = _____ mm (centre of chain bolt hole to side)
 D = _____ mm (side to centre of chain bolt hole)
 E = _____ mm (centre of hole to centre of other hole)
 F = _____ mm (Centre of bolt hole to side)
 G = _____ mm
 H = _____ mm
 I = _____ mm (chain bolt hole diameter)

- U = _____ mm (grouser width)
 V = _____ mm (depth/clearence)
 W = _____ mm
 X = _____ mm
 Y = _____ mm
 Z = _____ mm (thickness)

Rubber Pad bolt hole Dimensions

- P1 = _____ mm
 P2 = _____ mm
 P3 = _____ mm
 P4 = _____ mm

Number of grouser plates per track _____